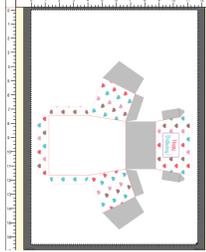
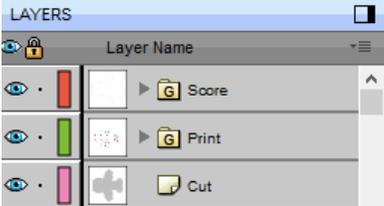



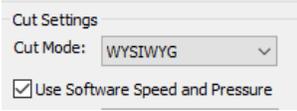
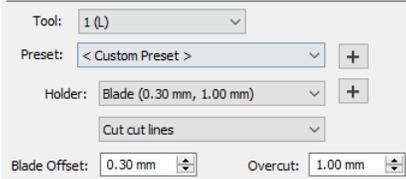
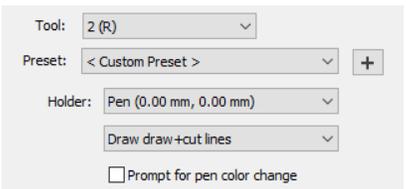


Skycut D: Print and Score and Cut Checklist

By Sandy McCauley December 27, 2019

Important: Check Skycut Control Panel to make sure **Use Double Head** option is marked on the **Home** screen.

<u>Step</u>	<u>SCAL Location</u>	<u>Screenshot</u>
1. Import or create your project.	Main screen	
2. Have separate layers for scoring, printing, and cutting. To keep things organized use Object>Group to group layers of the same type together.	Layers Panel	
3. Assign Score layer as Print + Cut Cut (will only “cut”, will not be printed). Assign Tool to right side: 2(R)	Style Panel	
4. Assign Cut layer as Print + Cut Cut (will only cut, will not be printed). Assign Tool to left side: 1(L)	Style Panel	
5. Assign Print layer as Print + Cut Print (will only print, will not cut).	Style Panel	
6. Select WYISWYG for Cut Mode . Mark Use Software Speed and Pressure . Otherwise, set Speed and Pressure on the Skycut control panel.	Cut Settings window	
7. Select Tool: 1 (L) and assign Holder as Blade . Enter other settings as appropriate.	Cut Settings window	
8. Select Tool: 2 (R) and assign Holder as Pen . Select Draw draw + cut lines . Unmark Prompt option. Enter other settings as appropriate.	Cut Settings window	
9. When printing the project, make sure Print Registration Marks option is selected.	Print window	